



ID-150AN

W x D x H (without leg) inch(mm)
 16.5" (421) x 25" (635) x 28" (710)



Feature

- 330 lbs(150 kg) daily Ice production
- 11 lbs(5 kg) storage Capacity – Serving 20~25 person in row
- Ideal solution for commercial, public, office purpose
- Rugged stainless steel evaporator and Auger ensures reliability
- Built-in installation – Space Saving
- Door-Open in Front – Easy Maintenance
- Three Modes Available (ICE / WATER / ICE & WATER)
- Automatic Flash – Scale Deposit Prevention
- UV Sterilization – Bacteria Deposit Prevention
- 304 Durable Stainless steel Construction
- R-404A Refrigerant

Dimensions

Dimensions	Net	Gross
Width	16.5" (421 mm)	18.8" (478 mm)
Depth	25" (635 mm)	30" (760 mm)
Height	28" (710 mm)	38.8" (985 mm)
Weight	143 lbs (65 kg)	165 lbs (75 kg)

Operating Limits

Ambient Temp Range	10 ~ 38 °C (50 ~ 100 °F)
Water Temp Range	10 ~ 32 °C (50 ~ 90 °F)
Water Pressure	20 ~ 80 psi (1.38 ~ 5.52 bar)
Voltage Range	±10% from regular voltage

Ice Type




NUGGET


Certification




Dimension – Unit : mm(inch)

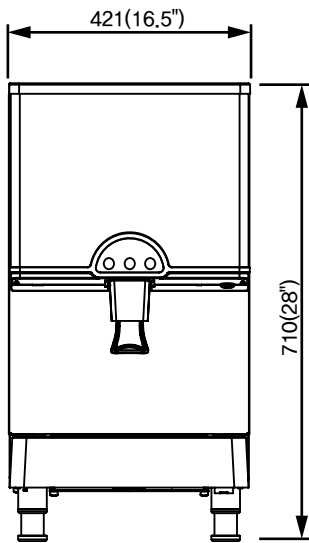

FRONT

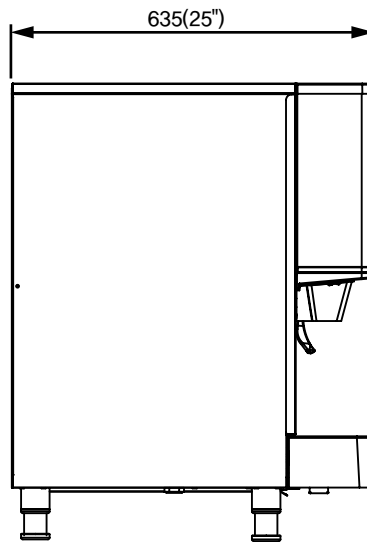

LEFT-SIDE

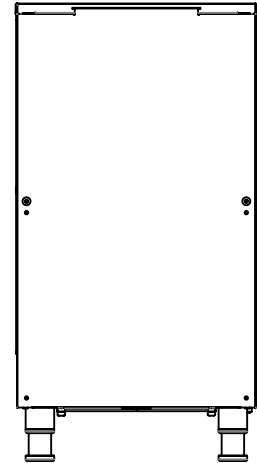



BACK

Specification

Model	Condenser	Ice Type	Ice Production 24 Hours		Power Consumption	Electrical Option	Water Usage gal/100 lbs. @90°/70°F (32°/21°C)	Power kWh/100 lbs. @90°/70°F (32°/21°C)
			Air/Water 21°C (70°F)/10°C (50°F)	Air/Water 32°C (90°F)/21°C (70°F)				
ID-150AN	Air-Cooled	NUGGET	309 lbs(140 kg)	243 lbs(110 kg)	620 W(±10 %)	208~230V/60Hz/1PH 220~240V/50Hz/1PH 115V/60Hz/1PH	12	6.79

Detail View



-  UV Sterilization – Optional
-  Detachable Inner Chute enables to take out inner chute for cleaning and sterilization



1. Built-in Installation – Space Saving
2. Serving 20 person in row based on 250 g for single serving portion
3. Easy Maintenance
4. Serving Ice and Water at once in Ice & Water mode

※ Design and Specification are subject to change without notice.